



ASSEMBLY GUIDE: LUGGAGE RACK

Version 1.0



Installation of the Gocycle Luggage Rack



CONTENTS

1. Gocycle Preparation	2
2. Luggage Rack Preperation	4
3. Luggage Rack Installation.....	5
4. Pannier Bag Installation.....	7




OVERVIEW

This assembly guide details installation of the Luggage Rack. If you have any questions, or require any further assistance, please contact techsupport@gocycle.com.

PARTS LIST

To successfully complete the procedure you will require the following parts:

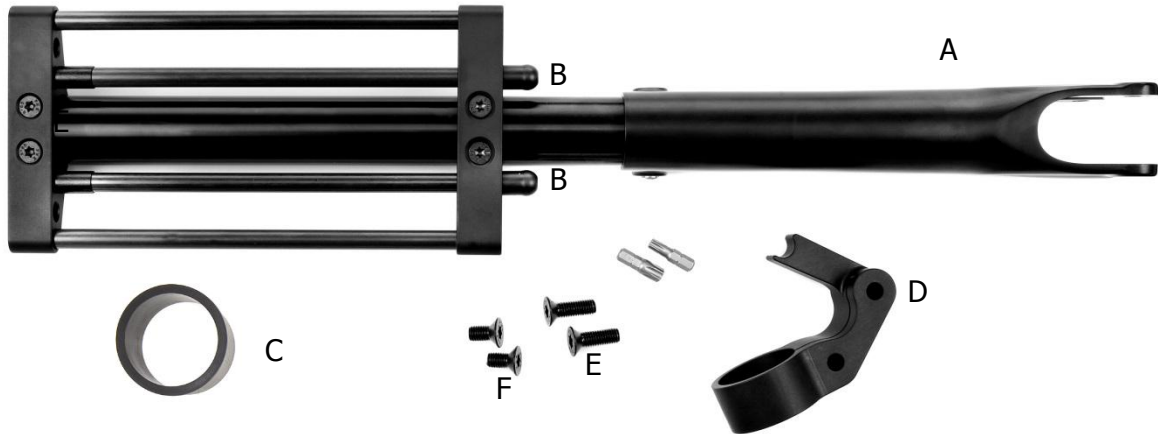

	Part Code	Part Description	Quantity
A	4102	Luggage Rack Assembly	1
B	4101	Luggage Rack Rods	2
C	4087	Luggage Rack Seat Tube Bush	1
D	4088	Luggage Rack Seatpost Clamp	1
E	4069	M8x25 CSK SS A4	2
F	2245	M8x16 CSK SS A4	2

TOOL LIST

To successfully complete this procedure you will require the following tools. *You can purchase special KKL tools by their tool number detailed below.*

Part Code	Tool Description
4064	4mm Allen Key Chrome
Supplied	T-45 1/4" driver bit 25mm long
Supplied	T-30 1/4" driver bit 25mm long



1. GOCYCLE PREPARATION



1.1. Use the 4mm Allen key to undo the Seatpost clamp.



1.2. Remove the Seatpost from the Gocycle.



1.3. Now remove the Seatpost bung from the Gocycle as shown.



1.4. Locate the Luggage Rack Seat tube bush (4087) and install into the Gocycle.



1.5. Press the bush into the Gocycle until fully seated.





2. LUGGAGE RACK PREPERATION



2.1. Install the Luggage Rack Seatpost clamp (4088) into the Luggage Rack Assembly (4102)



2.2. Install the two M8 x 16 bolts (2245) into the Luggage Rack Assembly left hand side as shown. You need to use the supplied T45 at this point to fully tighten.



2.3. Install the two M8 x 25 bolts (4069), using the T45 bit, into the Luggage rack assembly right hand side as shown – do not fully tighten the bolts at this point.



3. LUGGAGE RACK INSTALLATION



3.1. Install the Seatpost through the Luggage rack clamp and install the whole assembly into the frame as shown.



3.2. Ensure the Seatpost is fully inserted into the frame and then carefully lower the Luggage Rack so that the cut out profile meets the Lockshock strut as demonstrated.



Luggage Rack fully seated.



3.3. Confirm that the Luggage rack is installed in line with the Frame. Ensure the Seatpost and Saddle is also inline.



3.4. Using the T45, the two bolts on the right hand side of the Luggage rack clamp can now be fully tightened as shown.



3.5. Now Tighten the seat clamp bolt using a 4mm Allen key.



4. PANNIER BAG INSTALLATION



4.1. Take the two luggage rack rods and install into the luggage rack as shown.



Both rods installed for two pannier bags.



4.2 The pannier bag can now be installed. The luggage rack rod should interlock with the bag to prevent it from swinging.



Both Panniers installed.



4.3. Alternatively the rods can be used on one side of the rack if only using one pannier bag.

IMPORTANT NOTE: THE ABOVE ASSEMBLY STEPS MUST BE CARRIED OUT IN ORDER. FAILING TO DO SO MAY RESULT IN DAMAGE TO THE GOCYCLE.

If you have any further queries or comments, please contact Gocycle Technical Support:

techsupport@gocycle.com